

XINJE

DS5L2-20P4-PTA servo drive wiring diagram


Product Selection Support
Email : xinje3858@163.com



- Use external braking resistor
Connect the braking resistor to the P+ and C terminals, and remove the P+ and D short circuits;

P0-25=power value, P0-26=resistance value

External regenerative resistance : (recommended resistance value)	80Ω -100Ω
Minimum resistance : (no less than this value)	80Ω
External regenerative resistance : (recommended power value)	Above 200W

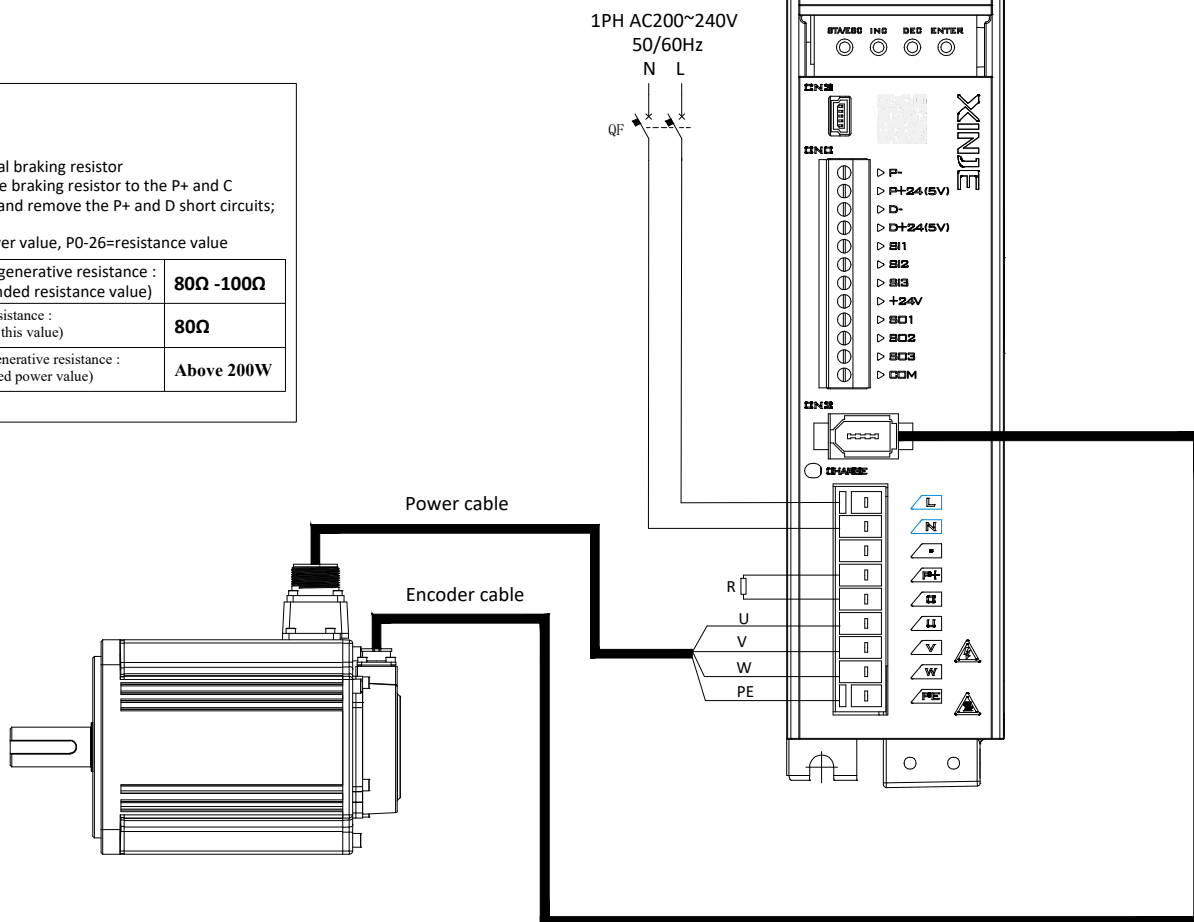


- The power supply voltage range of P-/P+ 24V and D-/D+ 24V is 18V~25V. The power supply voltage range of P-/P+5V, D-/D+5V is 3.3V~5V. There may be abnormal pulse and direction if the voltage is lower than 18V/3.3V.
- Servo pulse input port is ON at 10mA.
- In order to resist interference, twisted-pair shielding wire must be used. And the instruction signal cable is recommended to be within 3 meters. It is recommended to shield the 0V of the controller and ensure good grounding of the controller.
- If the pulse frequency of P+D sent by the controller is greater than 100kHz, a 500Ω 2W pull-up resistor needs to be connected in parallel at the PLC pulse output terminal, or a 2KΩ 1W pull-up resistor needs to be connected in parallel at the servo pulse receiving terminal.



- The ground wire is connected to the terminal; please check it before turning on the power.

CNO

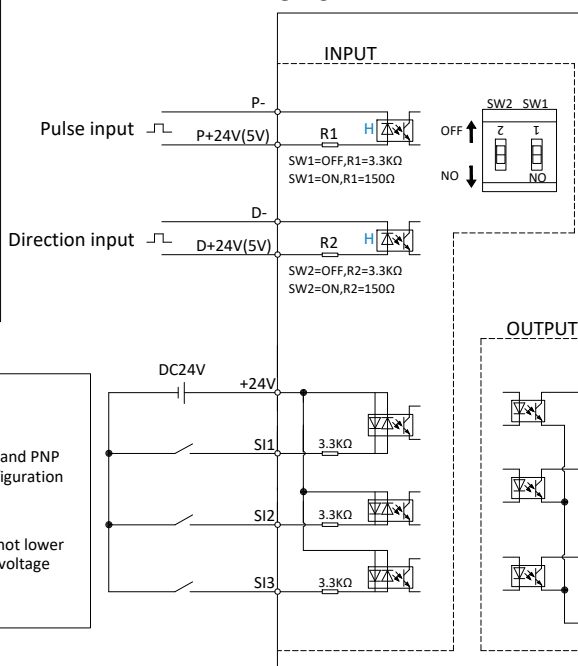

- All SI terminals support both NPN and PNP configurations, with only one configuration being usable at a time.
- Typical voltage DC24V, minimum not lower than DC18V, maximum allowable voltage not higher than DC28V.



- SO1 DC 500 mA (max), SO (other) DC 50 mA (max); Since the parking brake requires a relatively high current, when controlling the parking brake motor via SO, use the SO1 terminal, and set the parking brake parameter P5-44 to 0.0001.
- Maximum allowable voltage: 30 VDC
- All SO terminals support only NPN configuration.