

A

B


C

D







E

F

动力引出线 Power Connector				
位号 Terminal Number	A	B	C	D
颜色 Color	黄绿	蓝	黄	红
定义 Definition	PE	W	V	U

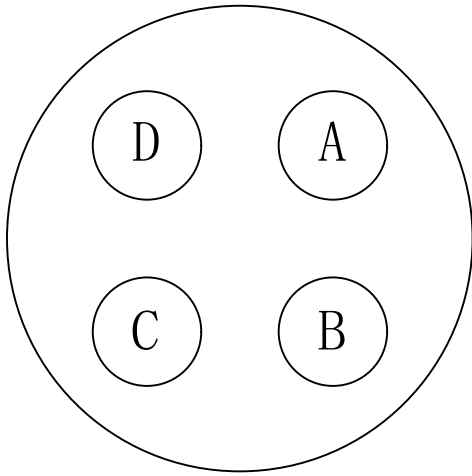

编码器引出线 Encoder Connector						
1	3	4	6	7	8	9
屏蔽层	橙	蓝	灰	棕	红	绿
屏蔽线	485-	485+	GND	电池-	5V	电池+

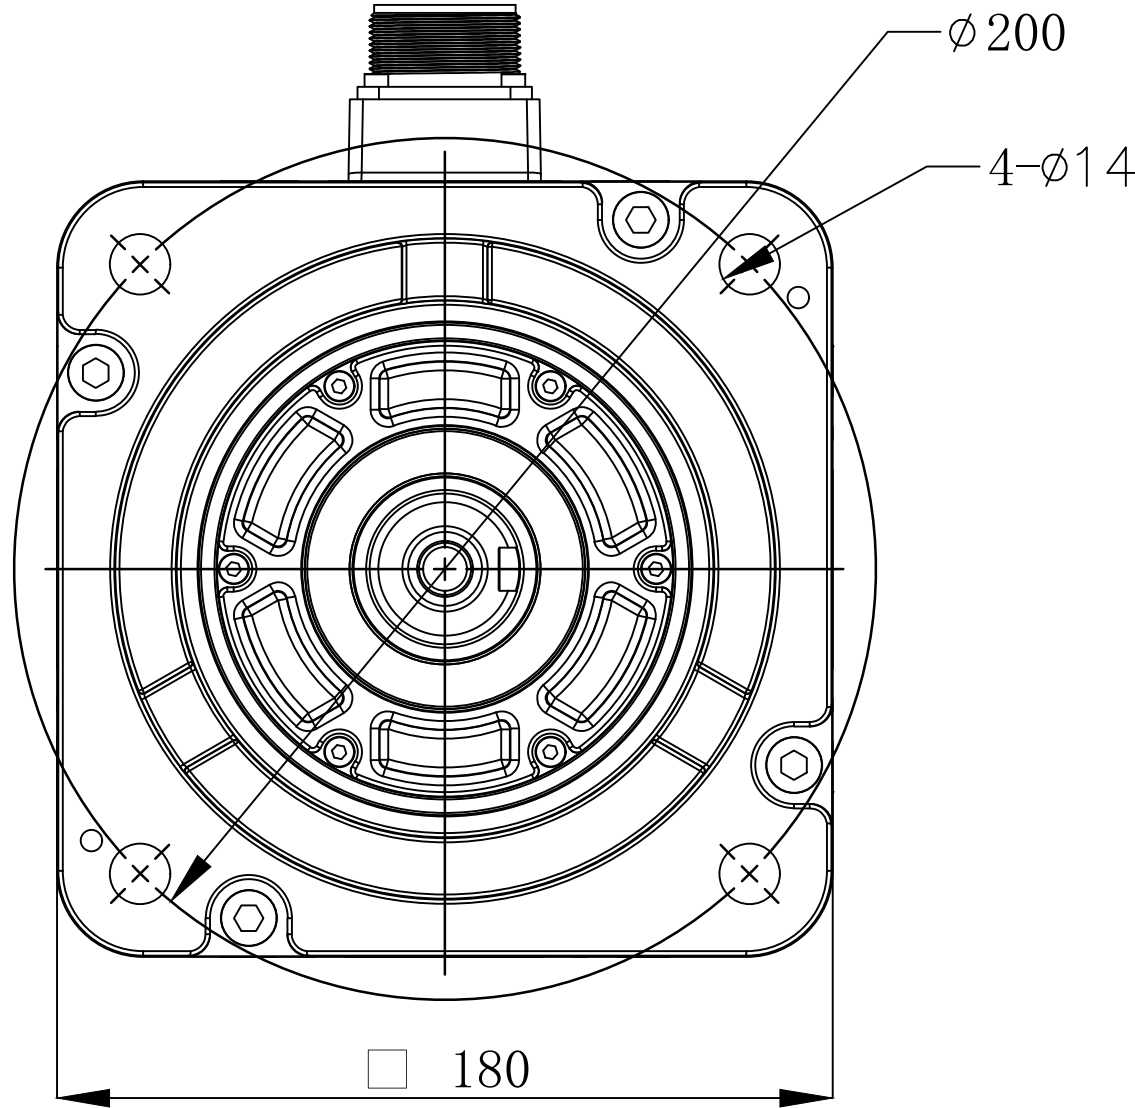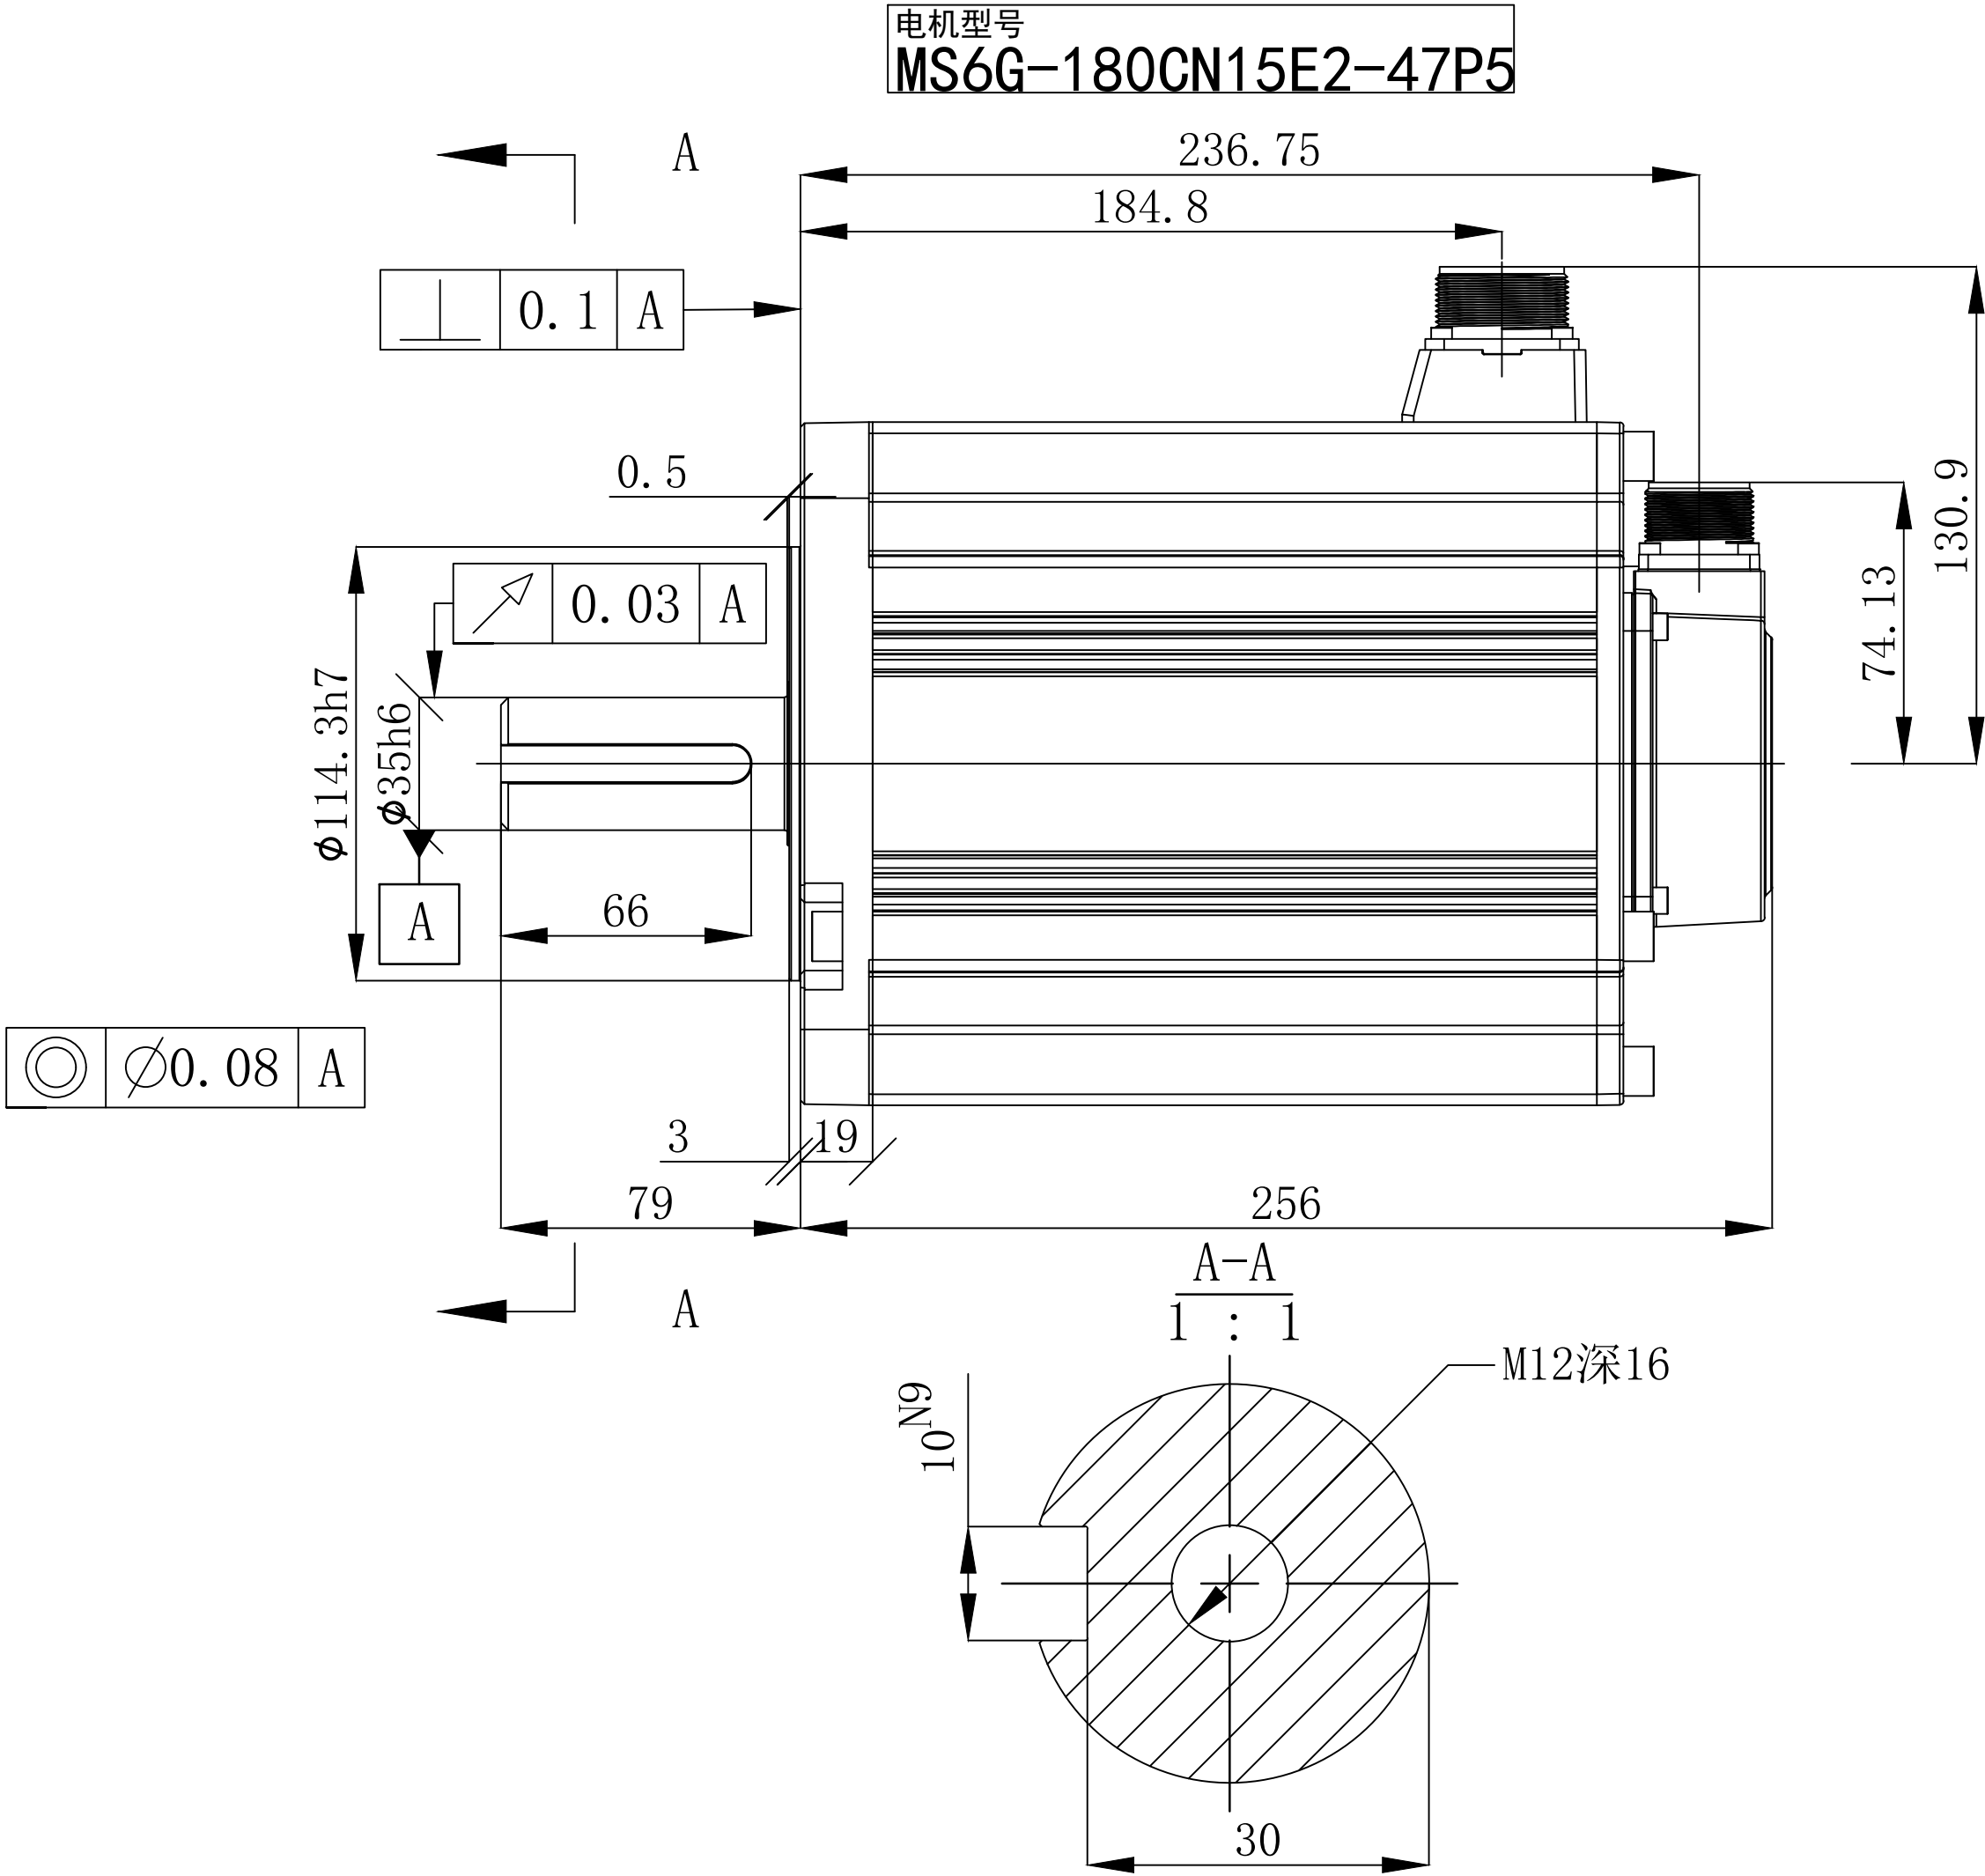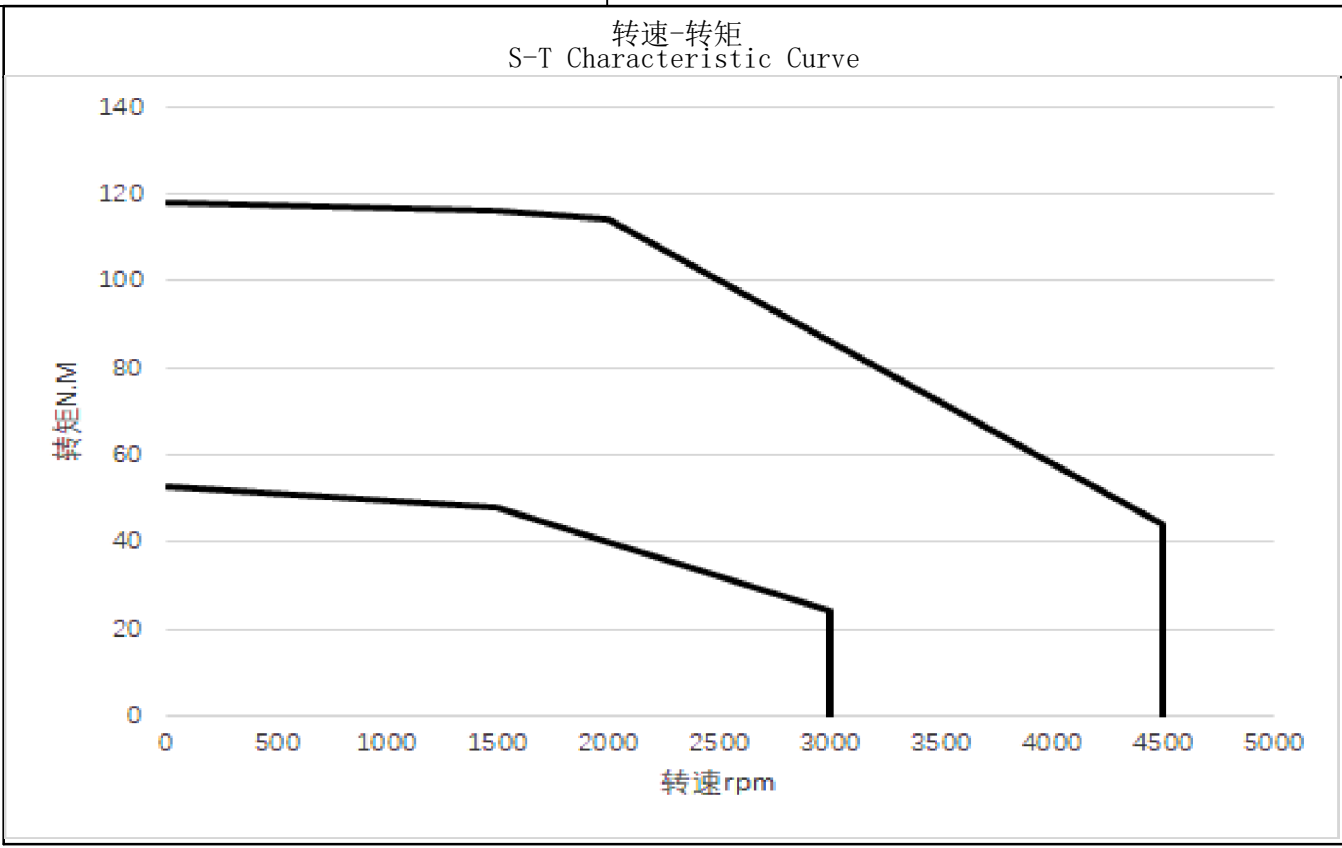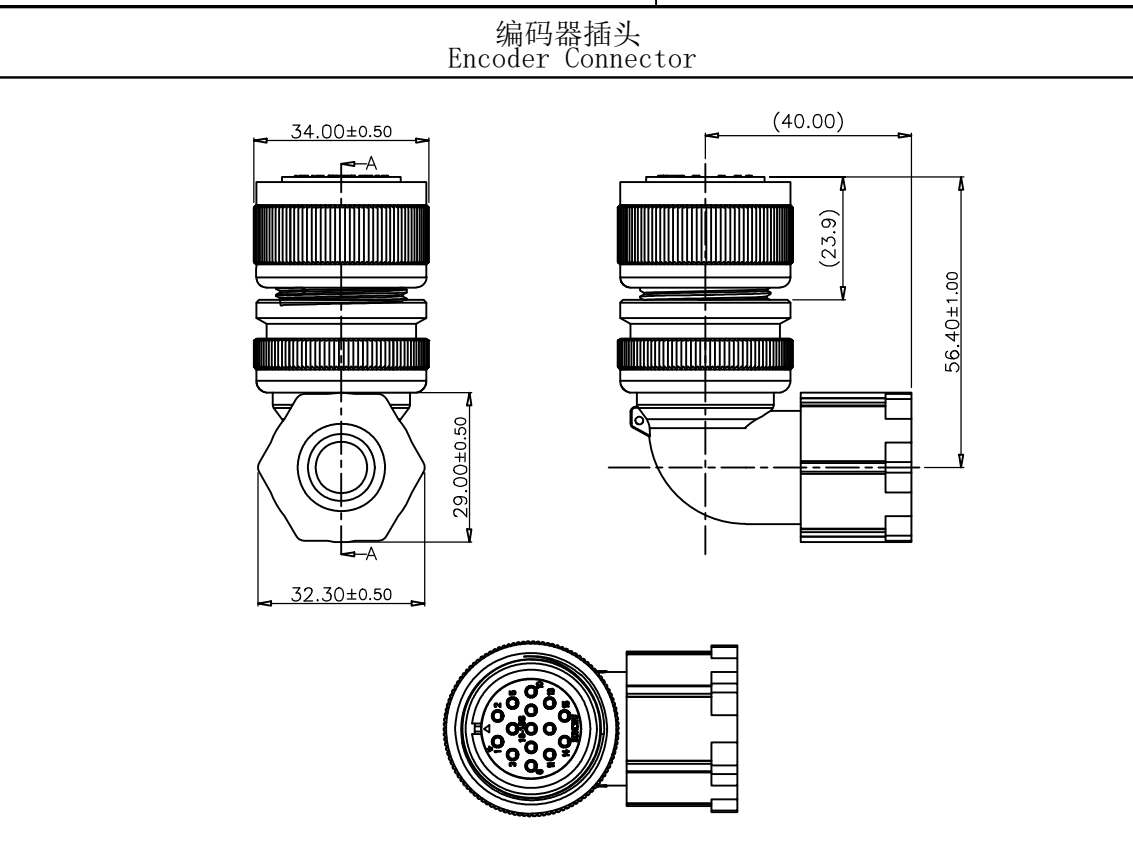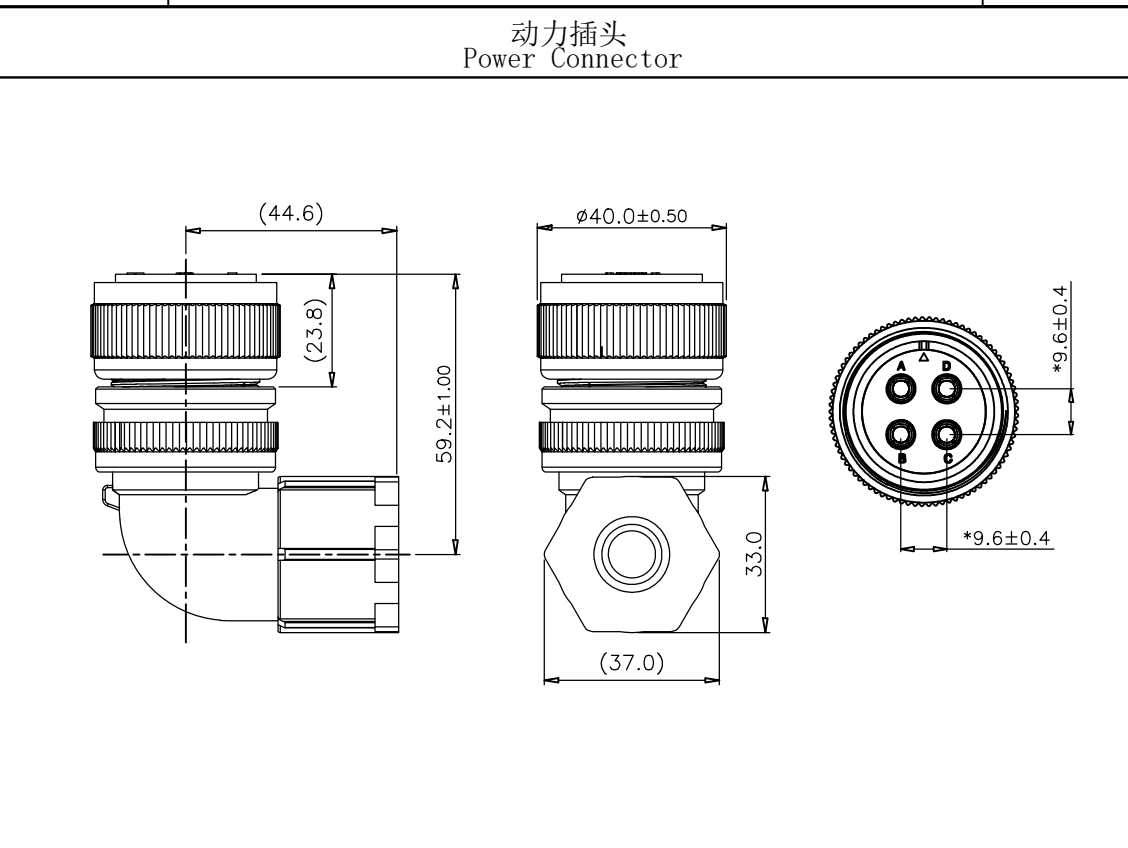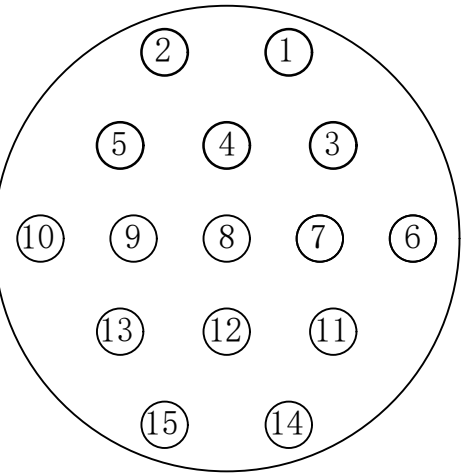

电机参数 Electric Machine Parameter	
型号 Specification And Type	MS6G-180CN15E2-47P5
惯量规格 Specification Of Inertia	中惯量
额定功率kW Rated Power	7.5
额定转矩N·m Rated Torque	48
瞬时最大转矩N·m Instantaneous Maximum Torque	120
额定电流Arms Rated Current	25
瞬时最大电流Arms Instantaneous Maximum Current	62.5
额定转速rpm Rated Rotation Speed	1500
最高转速rpm Maximum Rotation Speed	4500
转动惯量kg·m² Rotor Moment Of Intertia	135330×10 ⁻⁷
电压等级V Voltage Level	380
编码器规格 Specification Of The Encoder	19bit
耐压等级 Pressure Class	1800V 60S
绝缘电阻 Insulation Resistance	100MΩ DC500V以上 More Than 100MΩ DC500V
绝缘等级 Class Of Insulation	F
防护等级 Protection Level	IP (不含轴端) IP (Exclude Shaft End)
使用环境湿度RH Humidity Of Use Environment	20%~90%RH (不结露) 20%~90%RH (Non-dewfall)
使用环境温度℃ Operating Ambient Temperature	-10℃~40℃ (不结露) -10℃~40℃ (Non-frozen)
储存湿度RH Storage Humidity	20%~90%RH (不结露) 20%~90%RH (Non-dewfall)
储存温度℃ Storage Temperature	-20℃~60℃
冷却方式 Cooling Type	自然冷却

注：拿取电机应手握电机壳体本体，严禁拉拽电机动力线、编码器引出线。
严禁敲打电机任何位置，轻拿轻放。
Note: Take the motor should hold the motor shell body.It is strictly prohibited to pull the power line of the motor and the lead line of the encoder.
It is strictly prohibited to tap the motor,take and put it lightly.

1 新归档/替换				XINJE 无锡信捷电气股份有限公司 Wuxi Xinje Electric Co.,Ltd			
版本更改方式日期签字更改说明				7.5Kw伺服电机 MS6G-180CN15E2-47P5			
设计 Designed		标准化 Standardized		阶段标记 Stage Mark	版本 Edition	重量 Weight	比例 Scale
校对 Proofread					1		1:5
审核 Checked		会签 Countersign		共 1 张 第 1 张 of 1			
工艺 Processed		批准 Approved					