

A

B





C

D

E



F

动力引出线 Power Connector					编码器引出线 Encoder Connector				
位号 Terminal Number	A	B	C	D	2	3	4	5	6
颜色 Color	蓝 blue	黑 black	棕 brown	黄绿 yellow-green	红 red	黑 black	绿 green	绿黑 green-black	蓝 blue
定义 Definition	V	V	U	PE	SV	GND	485+	485-	电源+ cell+

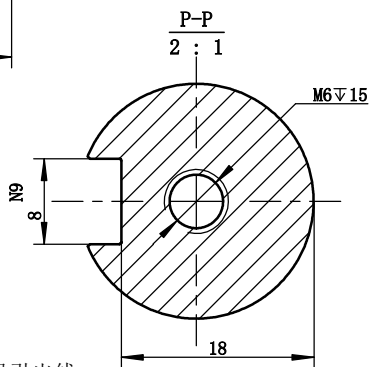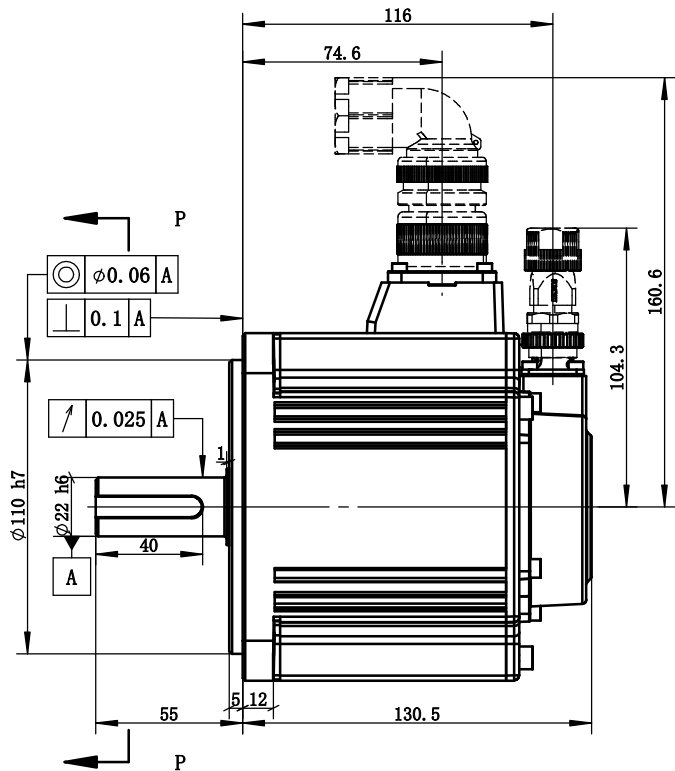

注：拿取电机应手握电机壳体本体，严禁拉拽电动力线、编码器引出线。
严禁敲打电机任何位置，轻拿轻放。

Note: Take the motor should hold the motor shell body. It is strictly prohibited to pull the power line of the motor and the lead line of the encoder.
It is strictly prohibited to tap the motor, take and put it lightly.

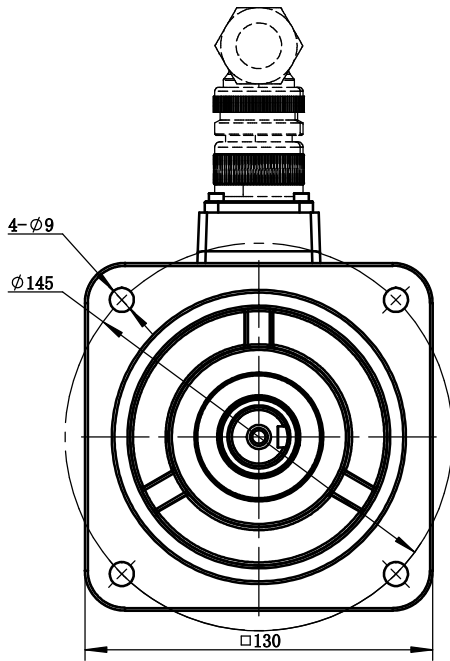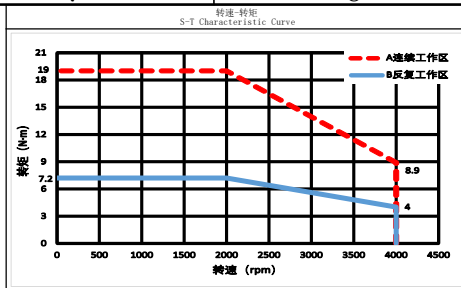

电机参数 Electric Machine Parameter	
型号 Specification And Type	MS6G-130CN20B2-41P5
惯量规格 Specification Of Inertia	中惯量 Moment Of Inertia
额定功率kW Rated Power	1.5
额定转矩* N·m Rated Torque	7.2
瞬时最大转矩* N·m Instantaneous Maximum Torque	19
额定电流A Rated Current	5.3
瞬时最大电流A Instantaneous Maximum Current	15.9
额定转速rpm Rated Rotation Speed	2000
最高转速rpm Maximum Rotation Speed	4000
转动惯量* kg·m² Rotor Moment Of Inertia	12140×10 ⁻⁷
电压等级V Voltage Level	380
编码器规格 Specification Of The Encoder	19bit
径向允许负载N Radial allowable load	686
轴向允许负载N Axial allowable load	196
耐压等级 Pressure Class	1800V 60S
绝缘电阻 Insulation Resistance	100MΩ DC500V以上 More than 100MΩ DC500V
绝缘等级 Class Of Insulation	F
防护等级 Protection Level	IP 67 (不含轴端) IP 67 (Exclude Shaft End)
使用环境湿度范围 Humidity Of Use Environment	20%~90%RH (不结露) 20%~90%RH (Non-dewfall)
使用环境温度℃ Operating Ambient Temperature	-10℃~40℃ (不结露) -10℃~40℃ (Non-frozen)
储存湿度范围 Storage Humidity	20%~90%RH (不结露) 20%~90%RH (Non-dewfall)
储存温度℃ Storage temperature	-20℃~60℃
冷却方式 Cooling Type	自然冷却 Natural Cooling

1 新归档				XINJE 无锡信捷电气股份有限公司 Wuxi Xinje Electric Co., Ltd.			
版本 Edition	更改方式 Modifications of the change	日期 Date	签字 Signature	更改说明 Description of the change			
设计 Designed			标准化 Standardized		阶段标记 Stage Mark	版本 Edition	重量 Weight
校对 Proofread			会签 Countersign			B	1
审核 Checked			会签 Countersign				6.44kg
工艺 Processed			批准 Approved		共 1 张	第 1 张	Page 1 of 1
				1.5kW伺服电机 MS6G-130CN20B2-41P5			